
## crossfire X300





## CROSSFIRE X300



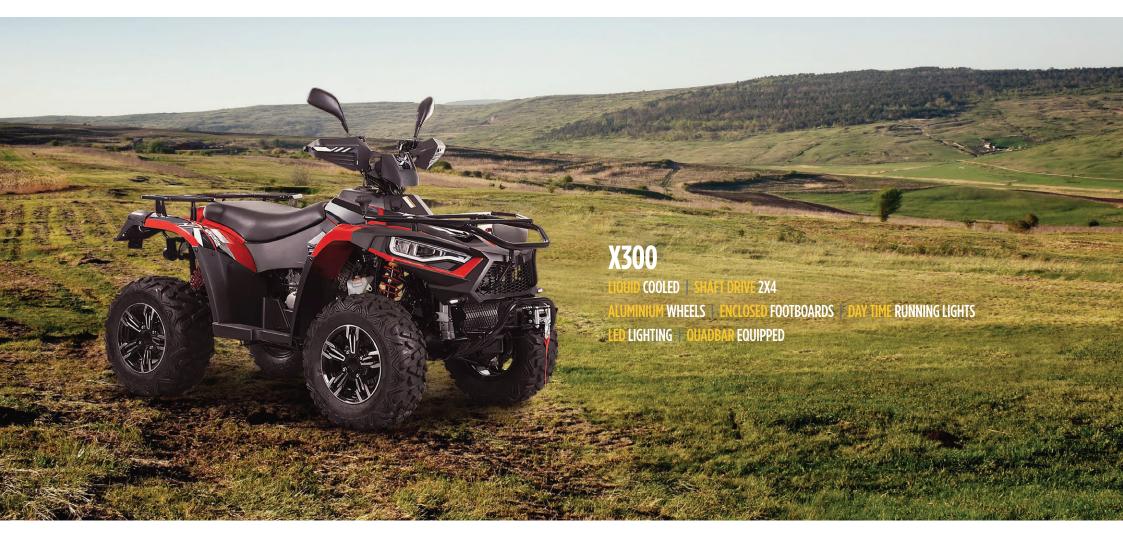





The Crossfire X300 is an addition to our growing fleet of ATVS. When we design each of our machines there is a purpose and a reason for existence. We have in mind the size and type of use our customers will put our machines through.

The X300 is a farm spec machine with Low Range and it is the first in range to go to shaft drive differential drive. The system is sealed and does not require daily maintenance like chain drive systems do.

The Crossfire X300 has a larger and more comfortable seating position with a padded seat .

The torque is dramatically increased and the X300 now has a larger clutch unit.

With water-cooling and large radiator specified for Australia conditions we believe this hard working quad will work as hard in the Kimberly as it does in Toowoomba.

X300 is a farm spec machine with Low Range and it is the first in range to go to shaft drive differential drive.

To comply with stage two requirements of the Consumer Goods Quad Bike Safety Standard the X300 comes with a Quad Bar CPD device and has been tilt angle tested. The minimum standard to pass the lateral stability tilt angle test is 28.81 degrees X300 exceeds the minimum lateral stability tilt angle test with a result of 32.4 degrees.

| Engine                     | LH173M, Single cylinder, 4 stroke    |
|----------------------------|--------------------------------------|
| Displacement               | 275cc                                |
| Power                      | 19HP                                 |
| Drive                      | Rear Wheel Drive 2x4                 |
| Cooling                    | Water Cooled                         |
| Carburettor                | CVK                                  |
| Starter                    | Electric start                       |
| Ignition                   | CDI                                  |
| Transmission               | Automatic L-H-N-R                    |
| Clutch                     | CVT                                  |
| Compression ratio          | 9.5:1                                |
| Bore x stroke              | 72.5x66.8 mm                         |
| Fuel capacity              | 14 L                                 |
| Suspension front           | McPherson independent suspension     |
| Suspension rear            | Swing arm                            |
| Wheelbase                  | 1215 mm                              |
| Brakes front               | Disk brake<br>Hand brake, Foot brake |
| Brakes rear                | Disk brake<br>Hand brake, Foot brake |
| Rims                       | 10" Rear 12" Front                   |
| Tyres front                | 24 x 8-12                            |
| Tyres rear                 | 24 x 11-10                           |
| Dimensions (L x W x H)     | 2100 x 1140 x 1270 mm                |
| Seat height                | 890mm                                |
| Ground clearance           | 170 mm                               |
| Empty vehicle weight (EVW) | 310 kg                               |
| Max rider and cargo weight | 129 kg                               |
| Towing capacity            | 140 kg                               |
| Winch                      | Optional \$399                       |
| Cargo racks                | Front & rear                         |
|                            |                                      |



